


AC2750



AS-Interface PCB module

PCB 4DI 4DO T W A/B

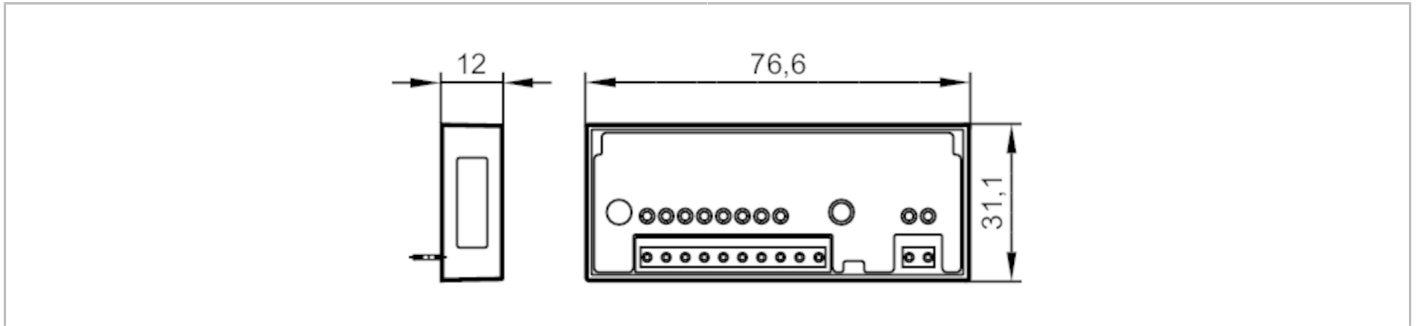

Application

Design	Only for operation with AS-i masters with the profile M4
Application	Housing for panel mounting

Electrical data

Operating voltage [V]	18...31.6 DC
Max. current consumption from AS-i [mA]	180; (without sensors: < 30 mA; inputs and outputs active: < 180 mA)
Protection class	III
Max. current load total [A]	0.15; (total current for all inputs and outputs supplied from AS-i: 150 mA)
Integrated watchdog	yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 4
------------------------------	---

Inputs

Number of digital inputs	4
Input circuit of digital inputs	PNP
Sensor supply of the inputs	AS-i
Voltage supply [V]	18...30; (DC)
Max. total current rating of inputs [mA]	150
Input current High [mA]	6...10
Input current low [mA]	0...2
Min. switching level high signal [V]	11
Digital inputs protected against short circuits	yes

AC2750



AS-Interface PCB module

PCB 4DI 4DO T W A/B

Outputs		
Electrical design	PNP	
Number of digital outputs	4	
Circuit	PNP	
Voltage range DC [V]	18...30; (DC)	
Max. current load per output [mA]	100; (utilization category DC-13 (control of electromagnets): 2,5 W (IEC 60947-5-1))	
Max. current load outputs total [A]	0.15	
Short-circuit proof	yes	
Electrically separated	yes	
Actuator supply outputs	AS-i	
Operating conditions		
Ambient temperature [°C]	-25...55	
Protection	IP 20	
Tests / approvals		
EMC	EN 50295	
AS-i classification		
AS-i version	3.0	
Extended addressing mode	yes	
AS-i profile	S-7.A.7	
AS-i I/O configuration [hex]	7	
AS-i ID code [hex]	A.7	
AS-i certificate	102301	
Mechanical data		
Weight [g]	75.5	
Type of mounting	Installation in a surface-mounted housing	
Dimensions [mm]	31.1 x 12 x 76.6	
Material	housing: PC potted	
Displays / operating elements		
Display	Power	LED, green
	errors	LED, red
	Function	LED, yellow
Remarks		
Remarks	A watchdog function switches the outputs off if there is no communication on the AS-i line.	
	Install the unit so that exposed parts cannot be touched.	
	Installation in a surface-mounted housing with the dimensions of 68 x 136 x 53 mm (LxWxH), e.g. Schneider Electric Harmony XALD03, XALD04	
	Do not connect any of the following points to an external potential:	
	0-, I+, I1, I2, I3, I4	
Pack quantity	The connections are electrically connected with the AS-i cable.	
	Can be used up to a height of 2000 metres above sea level	
Pack quantity	1 pcs.	

AC2750



AS-Interface PCB module

PCB 4DI 4DO T W A/B

Electrical connection

Cable: 0.2 m, PVC

I1 WH	Switching input sensor 1
I2 WH	Switching input sensor 2
I3 WH	Switching input sensor 3
I4 WH	Switching input sensor 4
O1 YE	Switching output actuator 1
O2 YE	Switching output actuator 2
O3 YE	Switching output actuator 3
O4 YE	Switching output actuator 4
0- BK	sensor- and actuator supply 0 V
I+ RD	sensor- and actuator supply 24 V
AS-i - (FLT) BU	AS-i -
AS-i + (PWR) BN	AS-i +