



AUXIL.CONTACT CAN BE MOUNTED ON 1NO+1NC,
FOR 5SX2+4+5

Model		
product brand name		SENTRON
Product designation		Auxiliary current switch
Design of the product		Mountable
Design of the product / factory mounted		No
Switching capacity		
Switching capacity current / Rated value	A	6
Main circuit		
Operating voltage / Rated value	V	230
Control current		
Type of voltage / of control voltage		AC/DC
Product details		
Product expansion		Auxiliary current switch
<ul style="list-style-type: none"> • can be mounted 		Circuit breaker
Number		
Number of fault signal contacts		0
Number of NC contacts		1
Number of NO contacts		1
Number of CO contacts		0
Mechanical Design		
Number of width units		0.5
Net weight	g	55

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)

other

[Environmental Confirmations](#)

[other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>


Industry Mall (Online ordering system)
<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SX9100>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
<http://support.automation.siemens.com/WW/view/en/5SX9100/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SX9100

CAX-Online-Generator
<http://www.siemens.com/cax>

Tender specifications
<http://ausschreibungstexte.siemens.com/tiplv>

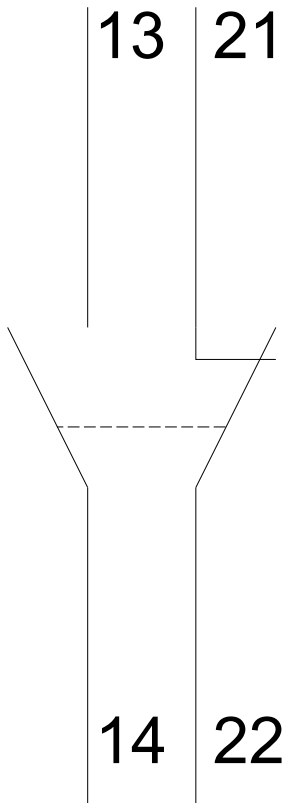

last modified:

27.04.2015