

**Features**

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Current input 4 mA ... 20 mA
- Current output 0 mA ... 20 mA
- Accuracy 0.1 %
- Up to SIL 2 acc. to IEC 61508

**Function**


This isolated barrier is used for intrinsic safety applications. The device drives I/P converters, electrical valves, and positioners in the hazardous area.

The device has current input and current output.

A current limit circuit in series to terminal 9 protects the device from damage. The maximum voltage drop at the input is 4 V DC, allowing for the connection of several devices due to the low voltage drop in order to maintain multiple galvanically isolated outputs (signal duplication).


The open circuit voltage is 24 V DC within the allowable supply voltage range at terminals 1 and 2. The maximum load that can be applied is 850 Ω.

**Assembly**

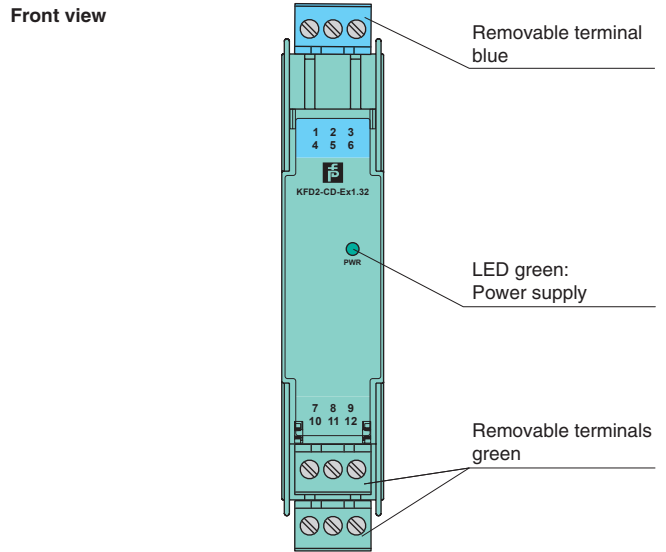

**SIL 2**

**Connection**

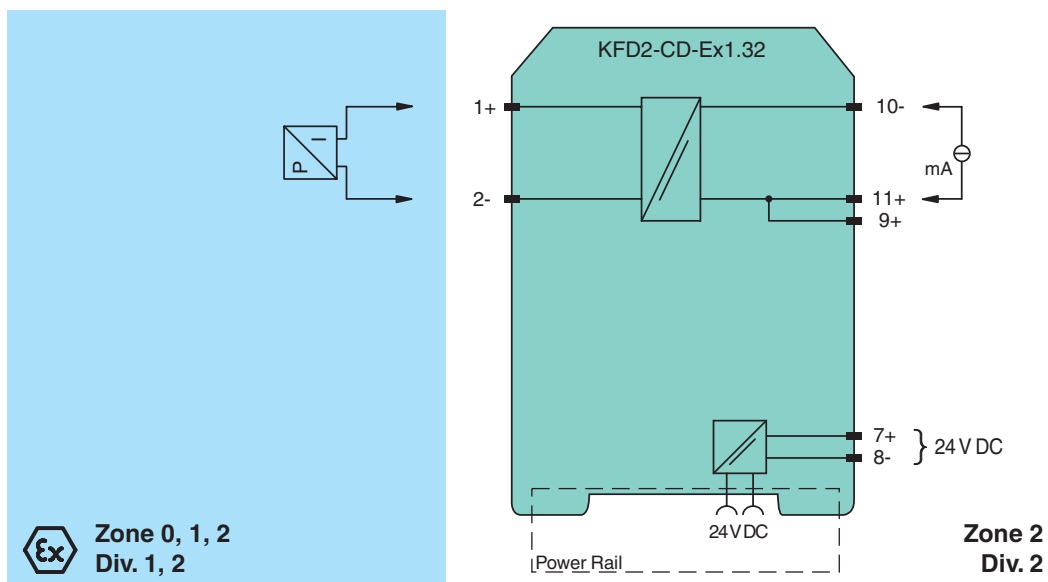

Release date 2019-01-15 08:51 Date of issue 2019-01-15 295000\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

<b>General specifications</b>		
Signal type		Analog output
<b>Functional safety related parameters</b>		
Safety Integrity Level (SIL)		SIL 2
<b>Supply</b>		
Connection		Power Rail or terminals 7+, 8-
Rated voltage	$U_r$	20 ... 35 V DC
Ripple		within the supply tolerance
Rated current	$I_r$	≤ 50 mA
Power dissipation		1.4 W
<b>Input</b>		
Connection side		control side
Connection		terminals 9+, 10-, 11+
Voltage drop		approx. 4 V at 20 mA
Input current		≤ 100 μA up to 50 °C (122 °F) at 10 V
Limit		≤ 40 mA
Transmission range		4 ... 20 mA
<b>Output</b>		
Connection side		field side
Connection		terminals 1+, 2-
Current		0 ... 20 mA
Load		≤ 850 Ω
Voltage		17 V at 20 mA
<b>Transfer characteristics</b>		
Accuracy		0.1 %
Deviation		
After calibration		≤ ± 0.1 % incl. non-linearity and hysteresis at 20 °C (68 °F)
Influence of ambient temperature		≤ ± 0.01 %/K
Rise time		< 10 ms
<b>Galvanic isolation</b>		
Input/power supply		functional insulation, rated insulation voltage 50 V AC
<b>Indicators/settings</b>		
Display elements		LED
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
<b>Conformity</b>		
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2012
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) , housing type B1
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>Data for application in connection with hazardous areas</b>		
EU-Type Examination Certificate		BAS 02 ATEX 7203 X
Marking		⊕ II (1)G [Ex ia Ga] IIC , ⊕ II (1)D [Ex ia Da] IIIC , ⊕ I (M1) [Ex ia Ma] I
Certificate		TÜV 99 ATEX 1499 X
Marking		⊕ II 3G Ex nA II T4
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
<b>International approvals</b>		
FM approval		
Control drawing		116-0440
UL approval		
Control drawing		116-0441 (cULus)
IECEx approval		IECEx BAS 05.0041X
Approved for		[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I
<b>General information</b>		

Release date 2019-01-15 08:51 Date of issue 2019-01-15 295000\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .
<b>Accessories</b>	
Optional accessories	<ul style="list-style-type: none"> <li>- power feed module KFD2-EB2(.R4A.B)(.SP)</li> <li>- universal power rail UPR-03(-M)(-S)</li> <li>- profile rail K-DUCT-BU(-UPR-03)</li> </ul>

Release date 2019-01-15 08:51 Date of issue 2019-01-15 295000\_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".