



RS1-X FOR ET 200S ELECTRO-MECH. REVERS. STARTER, EXPANDABLE SETTING RANGE 0.70...1.00A AC-3, 0.25KW/400V

General technical data:

product brand name		Sirius
Product designation		motor starter ET 200S
Design of the product		reversing starter
Product function		
• Bus communication		Yes
• direct start		No
• reverse starting		Yes
• on-site operation		Yes
• Short circuit protection		Yes
Design of the switching contact		electromechanical
Product component / Motor brake output		Yes
Trip class		CLASS 10
Type of assignment		2
Product feature		
• brake control with 230 V AC		No
• brake control with 24 V DC		No
• brake control with 180 V DC		No
• brake control with 500 V DC		No
Product expansion / braking module for brake control		Yes

Surge voltage resistance / Rated value	kV	6
Insulation voltage / Rated value	V	500
Active power loss / typical	W	10
maximum permissible voltage for safe isolation / between main and auxiliary circuit	V	400
Reference code <ul style="list-style-type: none"> • acc. to DIN EN 61346-2 • acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750 		Q A
Mounting type		Can be plugged into terminal module
Depth	mm	120
Height	mm	265
Width	mm	90

Main circuit:

Operating voltage <ul style="list-style-type: none"> • Rated value 	V	400 ... 500
Adjustable response value current <ul style="list-style-type: none"> • of the current-dependent overload release 	A	0.7 ... 1
Operating power <ul style="list-style-type: none"> • at AC-3 / at 400 V / Rated value • for three-phase motors / at 400 V / at 50 Hz • minimum 	kW	0.35 0.35 ... 0.35
Maximum short-circuit current breaking capacity (I_{cu}) / at 400 V / Rated value	kA	50
Design of short-circuit protection		circuit-breakers
Number of poles / for main current circuit		3
Type of the motor protection		bimetal
Mechanical service life (switching cycles) / of the main contacts / typical		100,000

Control circuit:

Type of voltage / of the control supply voltage		DC
Control supply voltage / 1 <ul style="list-style-type: none"> • for DC 	V	24 ... 24
Control supply voltage / 1 / for DC <ul style="list-style-type: none"> • Rated value 	V	20.4 ... 28.8

Supply voltage:

Type of voltage / of the supply voltage		DC
Supply voltage / 1 <ul style="list-style-type: none"> • for DC 	V	24 ... 24

Supply voltage / 1 / for DC		
• Rated value	V	20.4 ... 28.8

Ambient conditions:

Protection class IP		IP20
Ambient temperature		
• during operation	°C	0 ... 60
• during storage	°C	-40 ... +70
• during transport	°C	-40 ... +70
Relative humidity		
• during operation	%	5 ... 95
Vibration resistance		2g
Shock resistance		5g / 11 ms
Degree of pollution		3 at 400 V, 2 at 500 V according to IEC60664 (IEC61131)
Installation altitude / at height above sea level / maximum	m	2,000
mounting position		vertical, horizontal

Communication:

Protocol / is supported		
• PROFIBUS DP protocol		Yes
• PROFINET protocol		Yes
• AS-interface protocol		No
Design of the interface / PROFINET protocol		Yes
Design of the electrical connection		
• of the communication interface		via backplane bus
• for communication transmission		via backplane bus

Connections:

Number of digital inputs		0
Number of sockets		
• for digital input signals		0
• for digital output signals		0
Product function		
• digital inputs parameterizable		No
• digital outputs parameterizable		No
Design of the electrical connection		
• 1 / for digital input signals		using control module
• 2 / for digital input signals		using control module
• at the manufacturer-specific device interface		plug
• for main energy infeed		screw-type terminals

- for load-side outgoing feeder
- for main energy transmission
- for supply voltage infeed
- for supply voltage transmission
- for main current circuit

screw-type terminals
via energy bus
via backplane bus
via backplane bus
screw-type terminals

EMC:

Conducted interference BURST / acc. to IEC 61000-4-4	2 kV on voltage supply, inputs and outputs
Conducted interference conductor-earth SURGE / acc. to IEC 61000-4-5	2 kV (U > 24 V DC)
Conducted interference conductor-conductor SURGE / acc. to IEC 61000-4-5	1 kV (U > 24 V DC)
Field-bound parasitic coupling / acc. to IEC 61000-4-3	80 MHz ... 1 GHz 10 V/m, 1.4 GHz ... 2 GHz 3 V/m, 2 GHz ... 2.7 GHz 1 V/m
Certificate of suitability	CE / UL / CSA / CCC
Protection against electrical shock	finger-safe

Certificates/approvals:

General Product Approval

For use in hazardous locations



Declaration of Conformity

Test Certificates

other



[Type Test Certificates/Test Report](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator




<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK1301-0JB00-1AA2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RK1301-0JB00-1AA2

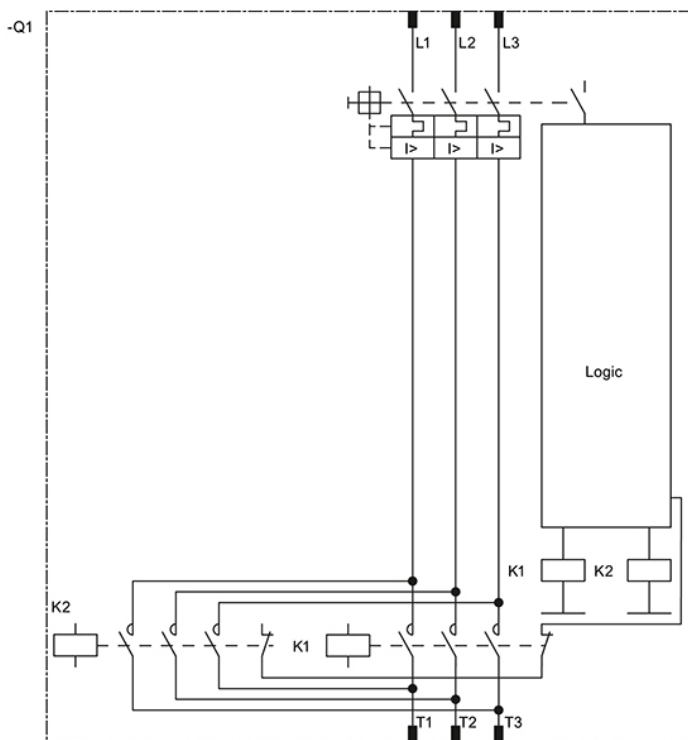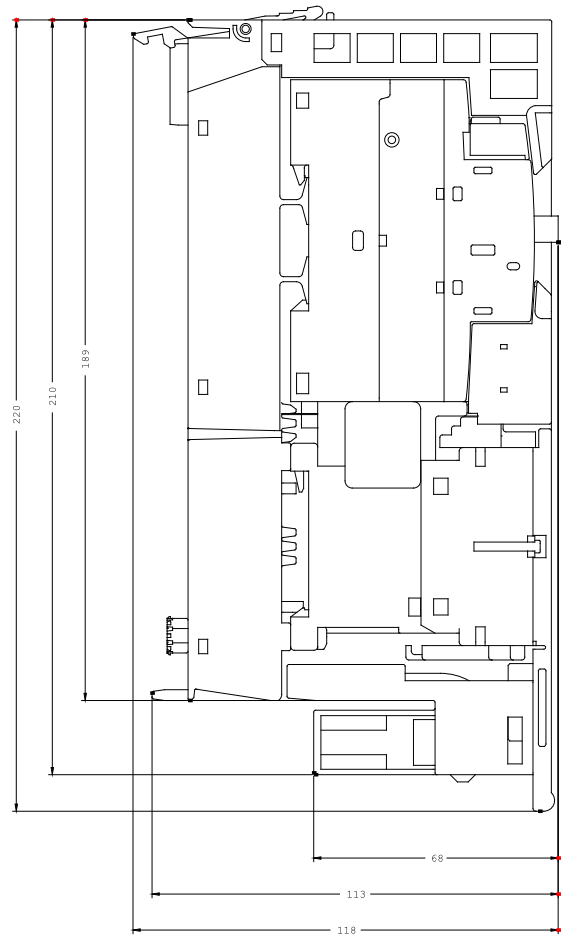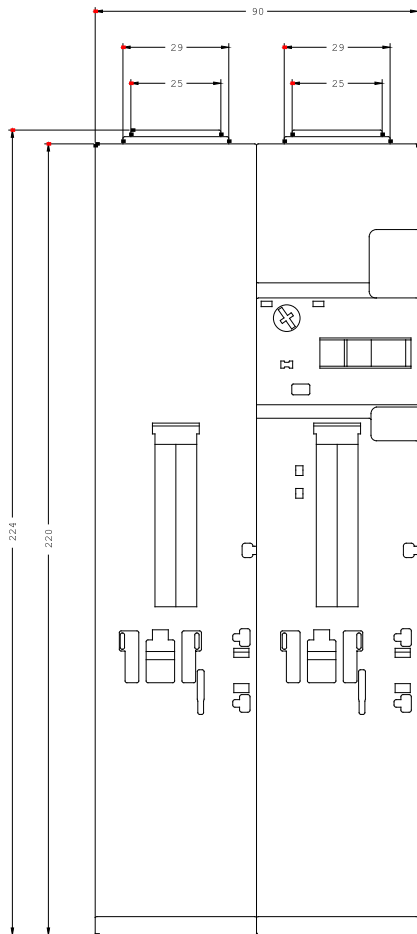

last change:

Nov 17, 2014