


E20228



Fiber optic through beam sensor

FE-00-P-A-R3

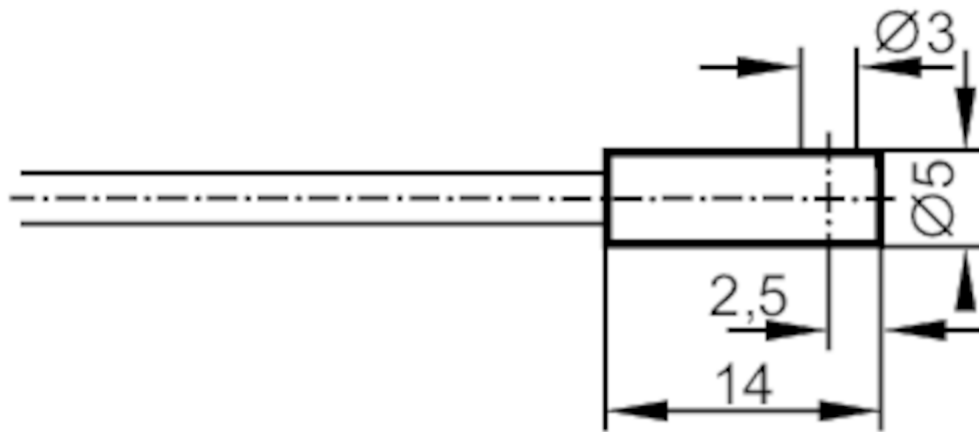

Application		
Design		90° deflection of the light beam
Function principle		Through-beam sensor
Monitoring range		
Range with fiber optic amplifier type		OKF; OUF; OOF
OKF		
Range of fiber optics	[mm]	120
OOF		
Range of fiber optics	[mm]	400
OUF		
Range of fiber optics	[mm]	120
Operating conditions		
Ambient temperature	[°C]	-20...80

E20228



Fiber optic through beam sensor

FE-00-P-A-R3

Mechanical data	
Weight [g]	54.5
Version of sensing head	angled
Sensing head diameter [mm]	5
Total length [mm]	600
Min. bending radius [mm]	20
Fiber arrangement	●
Fiber material	glass
Fiber head material	aluminum
Fiber sheath material	PVC
Accessories	
Items supplied	E20104
Remarks	
Pack quantity	1 pcs.