

M12-Bus terminating plug for CUBE67

Cube67

Terminating resistor

Male

M12, 6-pole

A-coded

Plastic housings with good resistance against chemicals and oils.



The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration




Male

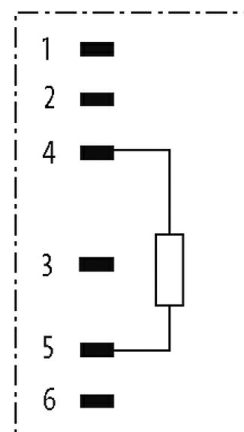

Product may differ from Image

Approvals



Form

Form 15041

Technical Data

| | |
|------------------------------------|--|
| Operating voltage | max. 30 V DC |
| Operating voltage (only UL listed) | max. 30 V DC |
| Operating current per contact | max. 4 A |
| Locking of ports | Screw thread (M12×1 mm) recommended torque 0.6 Nm, self-securing |
| Protection | IP67 inserted and tightened (EN 60529) |


General data

Temperature range -25...+85 °C

Commercial data

| | |
|-----------------------|---------------|
| country of origin | DE |
| customs tariff number | 85332100 |
| EAN | 4048879196963 |
| eClass | 19070403 |
| Packaging unit | 1 |

Sketch

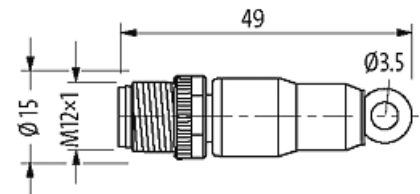

Product may differ from Image