



RU3500

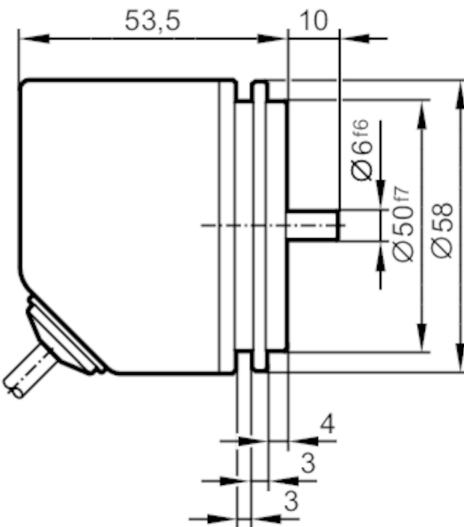

Incremental encoder with solid shaft

INCREMENTAL ENCODER BASIC LINE

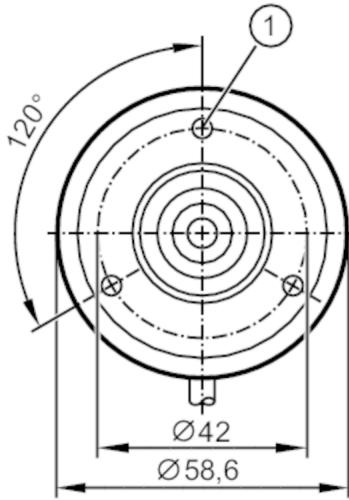

1 M4 x 0.7 Depth 6 mm



Product characteristics

Resolution	1...10000; (configurable; Factory setting: 1024) resolution
Communication interface	IO-Link
Shaft design	solid shaft
Shaft diameter [mm]	6

Application

Function principle	incremental
Detection system	magnetic

Electrical data

Operating voltage [V]	4.75...30 DC
Current consumption [mA]	< 150
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	0.5
Max. revolution electrical [U/min]	12000

Outputs

Electrical design	HTL/TTL
Switching frequency [kHz]	1000
Factory setting	Output function: HTL (50 mA)
Short-circuit protection	yes
Phase difference A und B [°]	90

Measuring/setting range

Resolution	1...10000; (configurable; Factory setting: 1024) resolution
------------	---

Accuracy / deviations

Accuracy [°]	0.1
--------------	-----

RU3500



Incremental encoder with solid shaft

INCREMENTAL ENCODER BASIC LINE

Software / programming		
Parameter setting options		Resolution; Direction of rotation; HTL; TTL
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SIO mode		yes
Min. process cycle time [ms]		2.3
Operating conditions		
Ambient temperature [°C]		-40...80
Note on ambient temperature		for flexibly laid cable: -25 °C
Storage temperature [°C]		-40...80
Max. relative air humidity [%]		95; (Condensation not permissible)
Protection		IP 65; IP 66; (on the housing: IP 67; on the shaft: IP 64)
Tests / approvals		
Shock resistance		100 g
Vibration resistance		20 g
MTTF [years]		292
Mechanical data		
Weight [g]		434.5
Dimensions [mm]		Ø 58 / L = 63.5
Material		flange: aluminum; housing: stainless steel (1.4521 / 444); cable plug: PA
Max. revolution, mechanical [U/min]		12000
Max. starting torque [Nm]		1
Reference temperature torque [°C]		20
Shaft design		solid shaft
Shaft diameter [mm]		6
Shaft material		stainless steel
Max. shaft load axial (at the shaft end) [N]		40
Max. shaft load radial (at the shaft end) [N]		60
Fixing flange		Synchro-flange
Electrical connection		
Cable: 2 m, Ø 4.9 mm; radial, can also be used axially; 5 x 0.14 mm ²		
IO-Link		
brown	L+	
white	not to be used	
blue	L-	
grey	not to be used	
black	IO-Link	
screen	housing	

Incremental encoder with solid shaft


INCREMENTAL ENCODER BASIC LINE

encoder

brown	UB
white	A
blue	GND
grey	B
black	Z/0-Pulse (90 deg)
screen	housing

Diagrams and graphs

Pulse diagram



Direction of rotation clockwise (looking at the shaft)